




EARLY FRAMING REMOVAL CRITERIA

PROPOSED GUIDELINES

Slab (inches)	Min. Required f _c (psi)	f _c @ 4000 psi (%)	Normal Cure (days)
4	2430	61%	7
5	1230	31%	3
6	720	18%	2
7	500	13%	1
8	500	13%	1
9+	500	13%	1

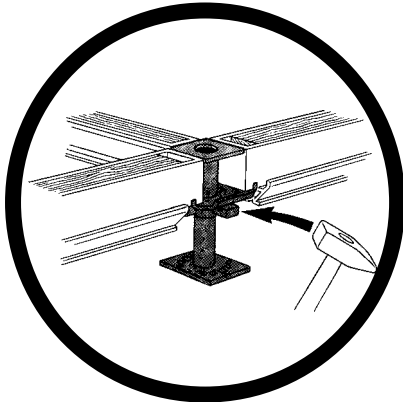

Design Considerations:

- Max. Post Shore spacing - 6'
- Max. distance Post Shore can be from edge - 40% of typical spacing
- Normal weight concrete (150 pcf)
- Construction Live Load - 50 psf
- Post Shores remain undisturbed until full stripping release
- Only aluminum framing members and unrestrained plywood can be removed
- "Normal cure days" is based on standard 28-day curve